



Dittokan

etiketter

Facestock

White, machine coated, semi-gloss appearance with 100% recycled content.

Basis Weight	80 g/m ²	ISO 536
Caliper	70 µm	ISO 534

Adhesive

A general purpose permanent, rubber based adhesive.

Liner

BG40 brown, supercalendered glassine paper.

Basis Weight	55 g/m ²	ISO 536
Caliper	49 µm	ISO 534

Laminate

Total Caliper	131 µm±10%	ISO 534
---------------	------------	---------

Performance Data

Initial Tack	18 N/25mm	FTM 9 Glass
Peel Adhesion 90°	9 N/25mm	FTM 2 St.St.
Min. Application Temp.	0 °C	
Service Temperature	-40 °C to 70 °C	

Adhesive Performance

The adhesive features excellent tack and adhesion on a wide variety of substrates, including apolar, slightly rough and curved substrates. Particularly good performance at lower temperatures, e.g. labeling of chilled products.

Applications and Use

100% post consumer recycled (PCR) paper material suitable as a general labelling material with very good sustainability credentials.

Conversion and Printing


Suitable for solid and halftone images and text printing by letterpress, flexo (UV and waterbased) offset and screen processes. Hot and cold foil stamping, varnishing and variable imprinting with thermal transfer are also suitable for this product. Being produced from 100% post consumer recycled paper (PCR), there is a possible higher incidence of impurities in the product compared to virgin fiber products.

Compliance and Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XXI as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry and moist, non fatty foodstuffs.

Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

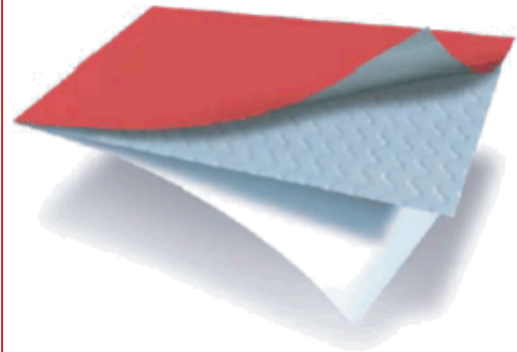

100 % FSCPapir RECYCLED

Permanent

FSC Liner



The mark of responsible forestry